


PRODUCT DATA SHEET

VSSC125PP

Rapid Self-Seal 125mmØ Pipe to Pipe Coupling

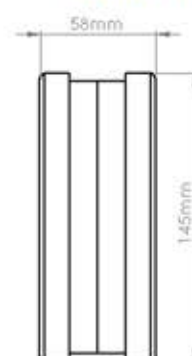

MANUFACTURER:	VERPLAS LTD
PART NUMBER:	VSSC125PP
SIZE:	125mmØ
FOR USE WITH:	VERPLAS SYSTEM 125
BOX QUANTITY:	50
INDIVIDUAL WEIGHT:	150g
COLOUR	White
MIN OPERATING TEMP	-15°C
MAX OPERATING TEMP	+60°C

SPECIFICATION DETAILS

The VSSC125PP 125mm diameter Pipe to Pipe Rapid Self-Seal Coupling is manufactured from (white) High Impact Polystyrene and has a minimum free area of 11,462mm².


The VSSC125PP incorporates a gasket to reduce air leakage to an absolute minimum in connections between System 125 ducting.

VSSC125PP is manufactured in compliance with Domestic Plastic Ductwork Specification DW/154 and does meet UL94HB flammability standard.

VSSC125PP has been designed for use with Verplas System 125 Round.

AIRFLOW	RESISTANCE
8 l/s	0.08 pa
13 l/s	0.15 pa
21 l/s	0.32 pa
30 l/s	0.55 pa
60 l/s	1.65 pa
120 l/s	5.04 pa

PERFORMANCE CURVE

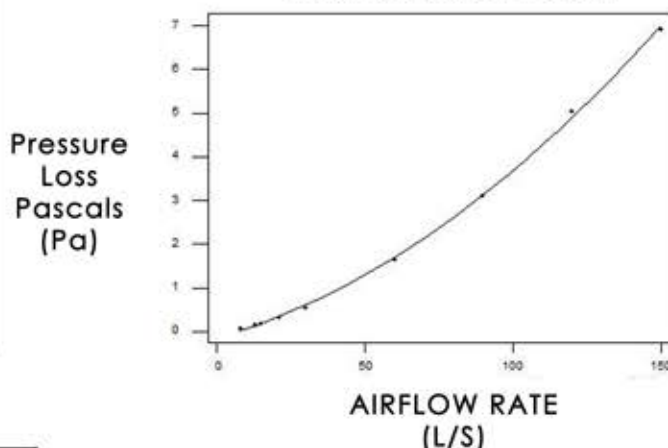

Associated Ancillaries

VSSC350
125mmØ Rapid Self-Seal
90° Round Bend



VSSC352
125mmØ Rapid
Self-Seal Round T-Piece



VKC2692
125mmØ 2m
Round Pipe



Scan Here
to find out
how quick
it is to install

