

TECHNICAL DATA SHEET




DucoFlex Connector with rubber D180-D180 (M/M)



The Connector with rubber D180-D180 is used to make a quick and good connection between ducts (exhaust and/or supply) with an inner diameter of 180 mm and to connect D180 ducts to an external heater DucoBox Energy Comfort (Plus) or a DucoBox with connection D180.

Specifications

Item number:	0000-4726
Dimensions (mm):	Outer diameter: 180 / 180 Height: 120
Airtightness class:	According to EN1751-2014(LUKA): D
Inside wall finish:	Smooth and flat inside wall
Maintenance:	Easy to clean
Compatibility:	DucoBoxes, external heater DucoBox Energy Comfort (Plus) and DUCO ISO ducts with connection D180
Connections:	2 x D180 (M)
Sealing rings:	Rubber, removable sealing rings
Scope of application:	Ventilation ducts (ETA / SUP / ODA / EHA) with diameter D180
Material:	PP and TPE shore 50
Colour:	Green (approx. RAL6018) / black
Weight:	215 g
Packaging:	Unpacked

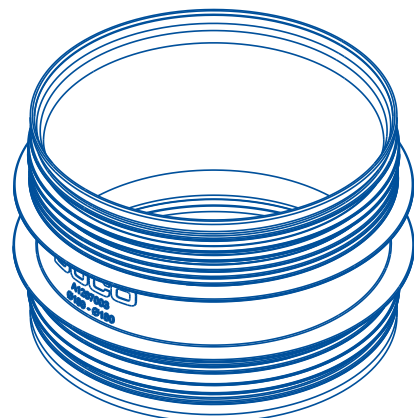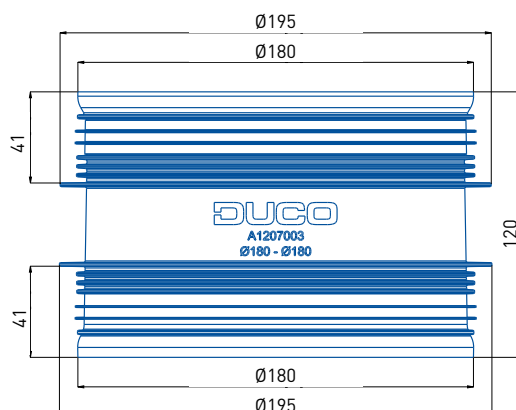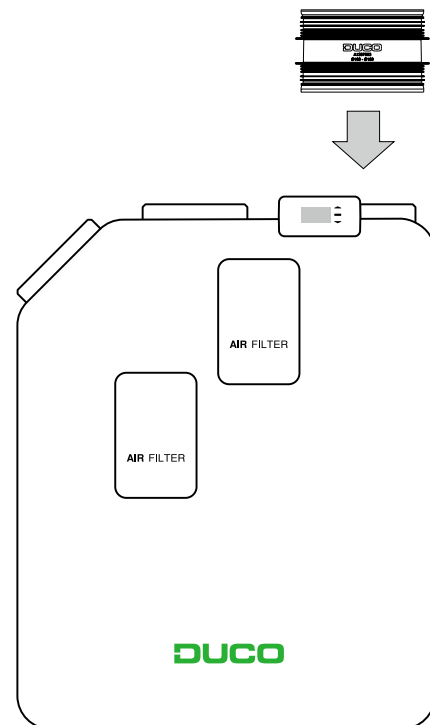

TECHNICAL DATA SHEET

DucoFlex Connector with rubber D160-D160 (M/M)



The Connector with rubber D160-D160 is used to make a quick and good connection between ducts (exhaust and/or supply) with an inner diameter of 160 mm and to connect ducts to a DucoBox with connection D160.

Specifications

Item number:	0000-4724
Dimensions (mm):	Outer diameter: 160 / 160 Height: 120
Airtightness class:	According to EN1751-2014(LUKA): D
Inside wall finish:	Smooth and flat inside wall
Maintenance:	Easy to clean
Compatibility:	DucoBoxes and DUCO ISO ducts with connection D160
Connections:	2 x D160 (M)
Sealing rings:	Rubber, removable sealing rings
Scope of application:	Ventilation ducts (ETA / SUP / ODA / EHA) with diameter D160
Material:	PP and TPE shore 50
Colour:	Green (approx. RAL6018) / black
Weight:	190 g
Packaging:	Unpacked

